

# SPIROL®

## PIN INSTALLATION TECHNOLOGY

### Model CR Semi-Automatic Pin Inserter

This robust, vertical pin insertion machine is ideally suited for moderate to high production for applications requiring up to 1,800 lbs. of installation force. A retractable pin orientation head, mounted on a shaft/linear bearing arrangement moves up and down for ease of loading and unloading of the components to be assembled. The insertion bushing is positioned close to the part for smooth, trouble free installation.

The orientation head shuttles the pin from the feeding position to the installation position, and also functions as a selector, preventing longer or shorter pins from being installed. A two position trap door allows for easy clear-out of the feed tube.

#### Design Features/Benefits:


- Precise:**
- Fine insertion depth adjustment
  - Doweled component location
  - Ground base plate to ensure perpendicularity between insertion quill and application
- Built to Last:**
- Cushioned cylinder return stroke
  - Hardened pin guide bushings and hard coated vibratory feeder bowl
- Versatile:**
- Can be easily configured to accommodate a variety of applications
- Efficient:**
- Automatically delivers pin to the installation site eliminating the need to touch the pin during entire assembly process
- Safe:**
- Guarded pinch points and anti-tie down, anti-repeat dual activation sensors (or optional foot switch with integrated finger protection unit)

Optional alignment fixtures available.


*Model CR  
shown without guard*

*—  
Guard is standard  
with all machines*

*—  
Shown with  
optional fixture*

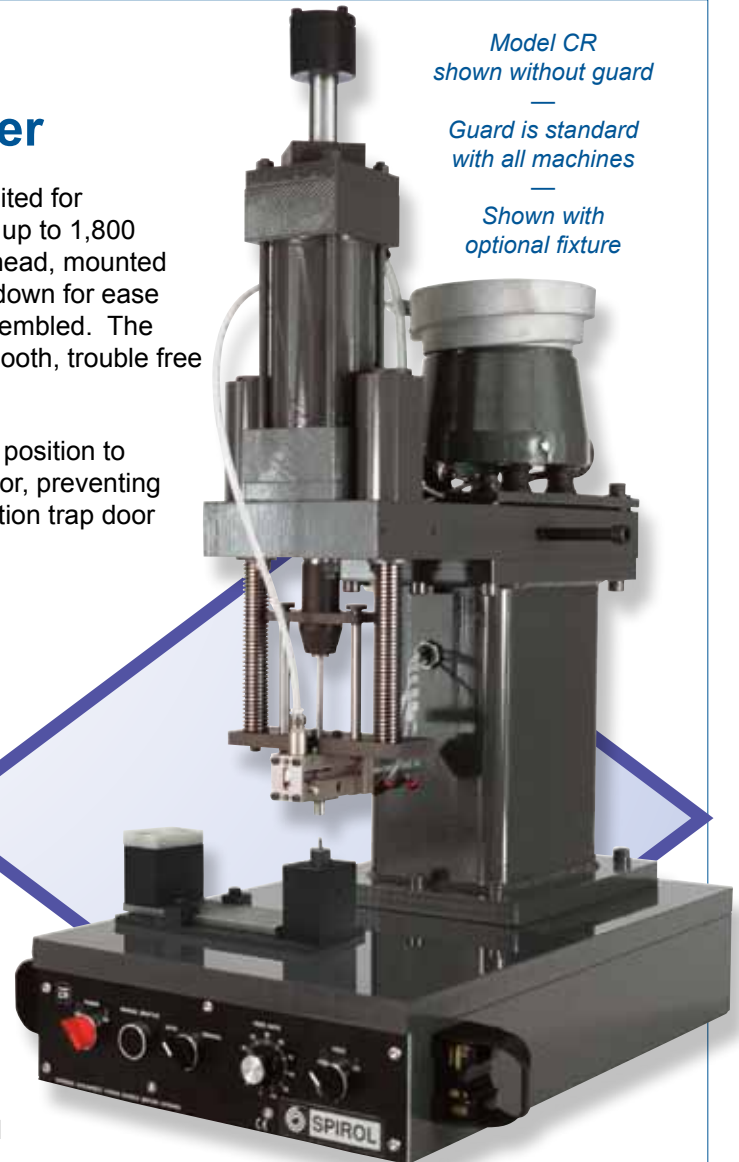

*Dual and triple versions of the Model CR are readily available to suit your assembly objectives. Options such as rotary index tables, pin sensing, force monitoring, and drilling and pinning combinations can be added for enhanced productivity and heightened error-proofing.*

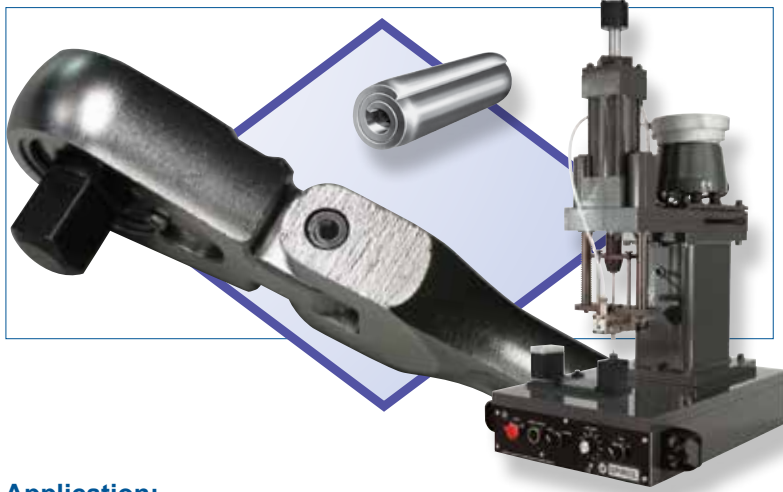

## Application:

A major manufacturer of hand tools was experiencing difficulty installing an Ø8mm Solid Grooved Pin into a pivot joint of a Flexible Head Ratchet tool. The tolerance on the diameter of the hole resulted in the Grooved Pin either being too difficult to install, which required time-consuming secondary effort, or too easy to install, which resulted in a pin retention issue during use. The previous method of assembly consisted of manually placing the Grooved Pin in the hole, loading the assembly into a press, and activating the press ram. This assembly process took approximately 15 seconds, and the scrap rate approached 5%.

## Solution:

**SPIROL's** Application Engineers recommended that the Solid Pin be replaced with an Ø8mm **Heavy Duty Coiled Pin**. The Coiled Pin's design enables it to absorb the wide hole tolerance without any adverse effects on performance. In addition, the unique characteristics of the Coiled Pin provides enough strength to withstand the forces generated during use, and the flexibility to absorb repetitive loading. The Coiled Pins are installed with **SPIROL's** standard **Model CR Automatic Pin Inserter**. The operator simply loads the assembly into a fixture, and then touches the dual optical actuation switches. Once the machine is activated, the insertion head advances, installs the pin, retracts and resets for the next cycle. This process is completed in only 5 seconds.

**SPIROL** provided the complete assembly solution. The reduction in assembly time and scrap paid for the machine in eight months.

**SPIROL** Application Engineers will review your application needs and work with your design team to recommend the best solution. One way to start the process is to select **Installation Systems** in our **Optimal Application Engineering** portal at [www.SPIROL.com](http://www.SPIROL.com).

## Technical Centers

### Americas

**SPIROL International Corporation**  
30 Rock Avenue  
Danielson, Connecticut 06239 U.S.A.  
Tel. +1 860 774 8571  
Fax. +1 860 774 2048

**SPIROL Shim Division**  
321 Remington Road  
Stow, Ohio 44224 U.S.A.  
Tel. +1 330 920 3655  
Fax. +1 330 920 3659

**SPIROL West**  
1950 Compton Avenue, Suite 112  
Corona, California 92881 U.S.A.  
Tel. +1 951 273 5900  
Fax. +1 951 273 5907

**SPIROL Canada**  
3103 St. Etienne Boulevard  
Windsor, Ontario N8W 5B1 Canada  
Tel. +1 519 974 3334  
Fax. +1 519 974 6550

**SPIROL Mexico**  
Carretera a Laredo KM 16.5 Interior E  
Col. Moisés Saenz  
Apodaca, N.L. 66613 Mexico  
Tel. +52 81 8385 4390  
Fax. +52 81 8385 4391

**SPIROL Brazil**  
Rua Mafalda Barnabé Soliane, 134  
Comercial Vitória Martini, Distrito Industrial  
CEP 13347-610, Indaiatuba, SP, Brazil  
Tel. +55 19 3936 2701  
Fax. +55 19 3936 7121

### Europe

**SPIROL France**  
Cité de l'Automobile ZAC Croix Blandin  
18 Rue Léna Bernstein  
51100 Reims, France  
Tel. +33 3 26 36 31 42  
Fax. +33 3 26 09 19 76

**SPIROL United Kingdom**  
17 Princewood Road  
Corby, Northants  
NN17 4ET United Kingdom  
Tel. +44 1536 444800  
Fax. +44 1536 203415

**SPIROL Germany**  
Ottostr. 4  
80333 Munich, Germany  
Tel. +49 89 4 111 905 71  
Fax. +49 89 4 111 905 72

**SPIROL Spain**  
08940 Cornellà de Llobregat  
Barcelona, Spain  
Tel. +34 93 193 05 32  
Fax. +34 93 193 25 43

**SPIROL Czech Republic**  
Sokola Tůmy 743/16  
Ostrava-Mariánské Hory 70900  
Czech Republic  
Tel/Fax. +420 417 537 979

**SPIROL Poland**  
ul. M. Skłodowskiej-Curie 7E / 2  
56-400, Oleśnica, Poland  
Tel. +48 71 399 44 55

### Asia Pacific

**SPIROL Asia Headquarters**  
1st Floor, Building 22, Plot D9, District D  
No. 122 HeDan Road  
Wai Gao Qiao Free Trade Zone  
Shanghai, China 200131  
Tel. +86 21 5046 1451  
Fax. +86 21 5046 1540

**SPIROL Korea**  
160-5 Seokchon-Dong  
Songpa-gu, Seoul, 138-844, Korea  
Tel. +86 (0) 21 5046-1451  
Fax. +86 (0) 21 5046-1540

e-mail: [info@spirol.com](mailto:info@spirol.com)