

# SPIROL®

## INSERT INSTALLATION TECHNOLOGY

### Model HA Automatic Heat Insert Driver

The **SPIROL Model HA Automatic Heat Insert Driver** provides an accurate and consistent method to install virtually any type of Heat/Ultrasonic Style Insert into thermoplastic assemblies. Considering that as much as 75% of the Inserts performance is a direct result of how well it was installed, all of the factors that impact installation must be carefully controlled in order to maximize performance. **SPIROL's** Model HA Automatic Heat Insert Driver has been designed to eliminate the dependency on the operator to control the factors of time, temperature and pressure to ensure nearly perfect flow of the plastic for optimal retention and performance.



With this exceptionally versatile machine, the operator does not need to physically touch the Insert during the entire installation process. The Inserts are loaded into a vibratory feeder and advance through the feed tube to the guarded heating chamber. The operator loads a plastic molded component into the fixture, and activates the machine by simply touching the dual opto-touch sensors. The Insert is melted into the component to the preset depth, and the orientation head retracts so that the operator can safely unload the completed assembly. Considering that the Insert is already preheated to the proper temperature, the installation time is much faster than other styles of Insert Drivers.

#### Design Features/Benefits:

- Reliable:** - Easily adjustable temperature setting with Hi-Low temperature lock-out for optimal melt and flow of plastic
- Safe:** - Guarded pinch points and ergonomically-friendly optical sensor actuation with anti-repeat, anti-tie down feature
- Quiet:** - Silent operation eliminates the harsh noise associated with ultrasonic installation methods
- Accurate:** - Micrometer style insertion depth adjustment for precise Insert positioning in the part
  - Pneumatic operation, with pressure regulator and flow controls to precisely control the insertion force and speed
- Versatile:** - Installs Inserts ranging in sizes from M2 to M8 metric threads and No. 2 to 3/8" unified threads
  - Can be easily configured to accommodate a variety of applications
- Efficient:** - Automatic Insert feeding and installation for maximum efficiency

**Optional alignment fixtures available.**

Model HA  
shown without  
guard

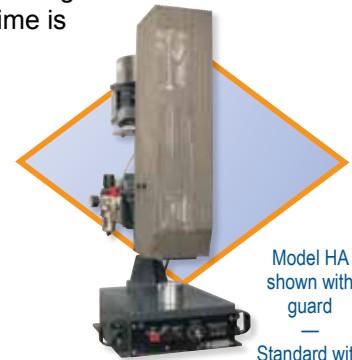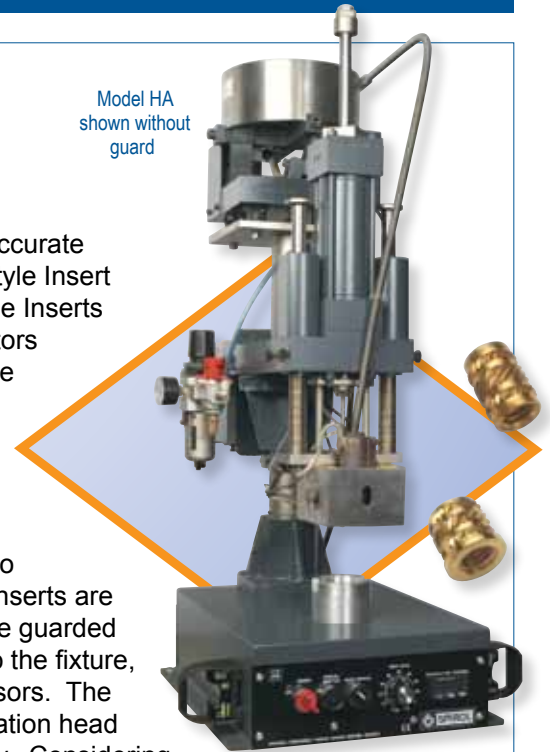

Model HA  
shown with  
guard  
—  
Standard with  
all machines

*Options such as rotary and linear part indexing, and part and Insert sensing can be added for enhanced productivity and heightened quality.*



### Application:

A specialized molder of chrome plated plastic automobile components wanted to improve their production efficiency, and enhance the quality of their final product in a very competitive environment. Their existing process called for installation of a steel threaded Insert into their various door handle covers after the molding process. They were manually installing the steel Insert by using an induction heating unit and a simple press. The installation process was extremely slow due to manual loading and the poor thermal conductivity of the steel Insert. In addition, if the Operator unloaded the assembly too quickly before the Insert cooled, the Insert would float out of position in the molten plastic. This process yielded erratic performance results. Production time was approximately 30 seconds per assembly, and the scrap rate was 8%.

### Solution:

After a comprehensive evaluation, **SPIROL** Application Engineers recommended replacing the steel Insert with a heated brass Insert, and installing it with a standard **Model HA Automatic Heat Insert Driver**. This machine automatically feeds, orients and delivers the Inserts to a heat chamber. The Inserts are quickly heated and ready for installation upon demand. The operator simply loads the component into a fixture, and activates the machine via dual opto sensors. The machine advances, installs the Insert, retracts and resets. The brass Insert begins cooling the moment it starts to enter into the plastic, and by the time it is fully installed, it cools enough to stay in its final position. The production time is less than 10 seconds, scrap is eliminated, and the final product yields consistent performance.

**SPIROL** Application Engineers will review your application needs and work with your design team to recommend the best solution. One way to start the process is to select **Installation Systems** in our **Optimal Application Engineering** portal at [www.SPIROL.com](http://www.SPIROL.com).

## Technical Centers

### Americas

**SPIROL International Corporation**  
30 Rock Avenue  
Danielson, Connecticut 06239 U.S.A.  
Tel. +1 860 774 8571  
Fax. +1 860 774 2048

**SPIROL Shim Division**  
321 Remington Road  
Stow, Ohio 44224 U.S.A.  
Tel. +1 330 920 3655  
Fax. +1 330 920 3659

**SPIROL West**  
1950 Compton Avenue, Suite 112  
Corona, California 92881 U.S.A.  
Tel. +1 951 273 5900  
Fax. +1 951 273 5907

**SPIROL Canada**  
3103 St. Etienne Boulevard  
Windsor, Ontario N8W 5B1 Canada  
Tel. +1 519 974 3334  
Fax. +1 519 974 6550

**SPIROL Mexico**  
Carretera a Laredo KM 16.5 Interior E  
Col. Moisés Saenz  
Apodaca, N.L. 66613 Mexico  
Tel. +52 81 8385 4390  
Fax. +52 81 8385 4391

**SPIROL Brazil**  
Rua Mafalda Barnabé Soliane, 134  
Comercial Vitória Martini, Distrito Industrial  
CEP 13347-610, Indaiatuba, SP, Brazil  
Tel. +55 19 3936 2701  
Fax. +55 19 3936 7121

### Europe

**SPIROL France**  
Cité de l'Automobile ZAC Croix Blandin  
18 Rue Léna Bernstein  
51100 Reims, France  
Tel. +33 3 26 36 31 42  
Fax. +33 3 26 09 19 76

**SPIROL United Kingdom**  
17 Princewood Road  
Corby, Northants  
NN17 4ET United Kingdom  
Tel. +44 1536 444800  
Fax. +44 1536 203415

**SPIROL Germany**  
Ottostr. 4  
80333 Munich, Germany  
Tel. +49 89 4 111 905 71  
Fax. +49 89 4 111 905 72

**SPIROL Spain**  
08940 Cornellà de Llobregat  
Barcelona, Spain  
Tel. +34 93 193 05 32  
Fax. +34 93 193 25 43

**SPIROL Czech Republic**  
Sokola Tůmy 743/16  
Ostrava-Mariánské Hory 70900  
Czech Republic  
Tel/Fax. +420 417 537 979

**SPIROL Poland**  
ul. M. Skłodowskiej-Curie 7E / 2  
56-400, Oleśnica, Poland  
Tel. +48 71 399 44 55

### Asia Pacific

**SPIROL Asia Headquarters**  
1st Floor, Building 22, Plot D9, District D  
No. 122 HeDan Road  
Wai Gao Qiao Free Trade Zone  
Shanghai, China 200131  
Tel. +86 21 5046 1451  
Fax. +86 21 5046 1540

**SPIROL Korea**  
160-5 Seokchon-Dong  
Songpa-gu, Seoul, 138-844, Korea  
Tel. +86 (0) 21 5046-1451  
Fax. +86 (0) 21 5046-1540

e-mail: [info@spirol.com](mailto:info@spirol.com)