

# SPIROL®

## PIN INSTALLATION TECHNOLOGY

### Model PMH Heavy Duty Manual Pin Inserter

This exceptionally versatile tool is ideally suited for low to moderate levels of production: from a single unit for prototype assembly, to multiple units on an assembly line. The **Model PMH** easily accommodates quick change-overs. The fixture is simply replaced at the base of the machine, and the pin diameter is easily changed by switching the pin driving chuck. The precisely machined rack and casting results in smooth operation, precise positioning, repeatability, and durability.

#### Design Features/Benefits:


- Easy:** - Simple to operate and easily adjustable
- Accurate:** - Base plate is pre-drilled for simple and precise fixture location
- Reliable:** - Cast iron frame, all heavy duty components
- Versatile:** - Installs pins ranging in diameter from 0.8 mm to 10 mm (1/32" to 3/8")
  - Easy tooling changeover to accommodate a variety of applications
- Capacities:** - 6.7 kN (1500 lbs.) maximum insertion force
  - Vertical adjustment: Uses spacer blocks
  - Fixed throat dimension: 120 mm (4.7")
  - Stroke: 76 mm (3") – 177 mm (7")
- Options:** - Torque-controlled handle that can be preset to the desired installation force
  - Resettable counter

#### Simple Operation:

1. Load the part to be pinned into an alignment fixture
2. Manually insert a pin into the spring-loaded jaws of the pin-driving chuck
3. Pull the lever until the unit reaches a finely adjustable pre-set stop
4. Release the lever
5. Unload the finished assembly


**Optional alignment fixtures available.**

**For higher production output, automated machines are readily available from SPIROL.**

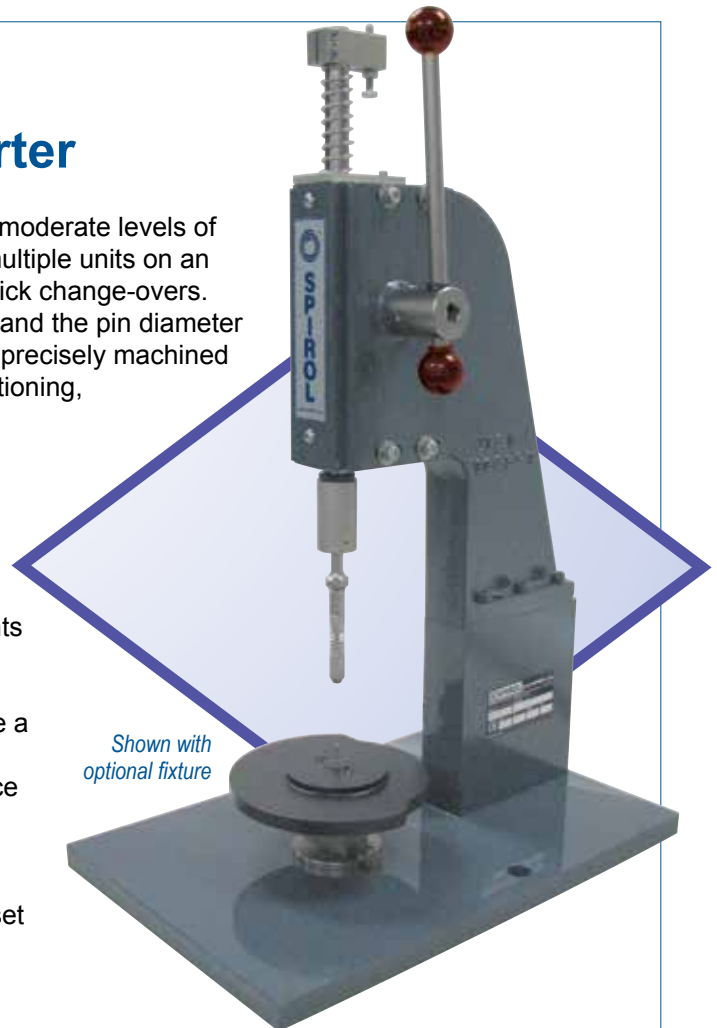

*Shown with optional fixture*

Easily accommodates  
**SPIROL Pin-Driving Chucks:  
CXA, CXD**

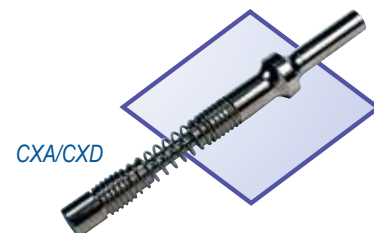

CXA/CXD

# SPIROL®

## Installation Made Easy



### SPIROL Model PMH Manual Pin Inserter

#### Application:

A pump manufacturer was manually pinning brass gears to steel shafts. The objective was to assemble the gear to the shaft without damaging the gear teeth. The current process was operator dependent and the pin being installed was difficult to hold, align and hammer into place without damaging the pin or assembly. The insertion force required to install the pin was approximately 750 lbs. They were pinning several different gear/shaft assemblies, therefore, quick and easy pin diameter and fixture changeover was a major concern.

#### Solution:

The **SPIROL Model PMH** Heavy Duty Manual Pin Inserter was the perfect solution. The manual machine is capable of insertion forces up to 1,500 lbs, is low cost, portable, and easily convertible from one application to the next. The PMH equipped with a spring-loaded alignment pin resolved the alignment issue and provided a fixturing solution that holds the assembly in place during the pinning operation. The **SPIROL CXA Pin Driving Chuck** supports the pin during the entire installation process and the press has a positive stop for pin depth control, significantly reducing operator dependence. Various assembly sizes are easily accommodated by changing the fixture, CXA tool and fine adjustment of the installation stroke.

The Model PMH Heavy Duty Manual Pin Inserter met the assembler's need for flexibility and ease of installation for their low volume, multiple size, high insertion force applications.

*Also consider our **SPIROL Models PR and CR machines** for automatic feeding and insertion.*

**SPIROL** Application Engineers will review your application needs and work with your design team to recommend the best solution. One way to start the process is to select **Installation Systems** in our **Optimal Application Engineering** portal at [www.SPIROL.com](http://www.SPIROL.com).

## Technical Centers

### Americas

**SPIROL International Corporation**  
30 Rock Avenue  
Danielson, Connecticut 06239 U.S.A.  
Tel. +1 860 774 8571  
Fax. +1 860 774 2048

**SPIROL Shim Division**  
321 Remington Road  
Stow, Ohio 44224 U.S.A.  
Tel. +1 330 920 3655  
Fax. +1 330 920 3659

**SPIROL West**  
1950 Compton Avenue, Suite 112  
Corona, California 92881 U.S.A.  
Tel. +1 951 273 5900  
Fax. +1 951 273 5907

**SPIROL Canada**  
3103 St. Etienne Boulevard  
Windsor, Ontario N8W 5B1 Canada  
Tel. +1 519 974 3334  
Fax. +1 519 974 6550

**SPIROL Mexico**  
Carretera a Laredo KM 16.5 Interior E  
Col. Moisés Saenz  
Apodaca, N.L. 66613 Mexico  
Tel. +52 81 8385 4390  
Fax. +52 81 8385 4391

**SPIROL Brazil**  
Rua Mafalda Barnabé Soliane, 134  
Comercial Vitória Martini, Distrito Industrial  
CEP 13347-610, Indaiatuba, SP, Brazil  
Tel. +55 19 3936 2701  
Fax. +55 19 3936 7121

### Europe

**SPIROL France**  
Cité de l'Automobile ZAC Croix Blandin  
18 Rue Léna Bernstein  
51100 Reims, France  
Tel. +33 3 26 36 31 42  
Fax. +33 3 26 09 19 76

**SPIROL United Kingdom**  
17 Princewood Road  
Corby, Northants  
NN17 4ET United Kingdom  
Tel. +44 1536 444800  
Fax. +44 1536 203415

**SPIROL Germany**  
Ottostr. 4  
80333 Munich, Germany  
Tel. +49 89 4 111 905 71  
Fax. +49 89 4 111 905 72

**SPIROL Spain**  
08940 Cornellà de Llobregat  
Barcelona, Spain  
Tel. +34 93 193 05 32  
Fax. +34 93 193 25 43

**SPIROL Czech Republic**  
Sokola Tůmy 743/16  
Ostrava-Mariánské Hory 70900  
Czech Republic  
Tel/Fax. +420 417 537 979

**SPIROL Poland**  
ul. M. Skłodowskiej-Curie 7E / 2  
56-400, Oleśnica, Poland  
Tel. +48 71 399 44 55

### Asia Pacific

**SPIROL Asia Headquarters**  
1st Floor, Building 22, Plot D9, District D  
No. 122 HeDan Road  
Wai Gao Qiao Free Trade Zone  
Shanghai, China 200131  
Tel. +86 21 5046 1451  
Fax. +86 21 5046 1540

**SPIROL Korea**  
160-5 Seokchon-Dong  
Songpa-gu, Seoul, 138-844, Korea  
Tel. +86 (0) 21 5046-1451  
Fax. +86 (0) 21 5046-1540

e-mail: [info@spirol.com](mailto:info@spirol.com)