

## Introduction

The focus of this article is on two of the most commonly used Insert installation methods in thermoplastic parts: **heat and ultrasonic installation**.


As the usage of plastic parts has increased in a wide array of industries, the methods for fastening have become increasingly important. When screws or bolts are threaded directly into plastic components, failures can occur due to stripped threads or plastic creep<sup>1</sup>. In situations where joint strength and the ability to assemble and disassemble without degradation of components is required, **Threaded Inserts** provide a serviceable thread which satisfies both of these needs.

Before going into detail on heat versus ultrasonic installation, it is important to note that there are other methods for installing Inserts, as shown in *Table 1*. Installation of Inserts after molding (post mold) versus molding-in reduces costs by shortening molding time. Post mold installation also reduces the chance of scrap and potential mold damage resulting from dislodged Inserts. As shown in *Table 1*, heat and ultrasonic installation is only used with thermoplastic parts. Thermoplastics are solid at normal temperatures and can be re-melted a number of times, whereas thermosets have a one-time reaction in their conversion from liquid to solid and cannot be re-melted.


With both heat and ultrasonic installation methods, the Insert is embedded into a molded or drilled hole through re-melting of the plastic. Retention within the hole is provided by the

melted plastic conforming to the external features of the Insert (*Figure 1*). A sufficient volume of plastic must be displaced to entirely fill these external features so that the Insert achieves maximum performance when the plastic solidifies. An accurate way of determining sufficient plastic flow into the knurls, barbs and undercuts of the Insert is to take a cross section of the installed Insert and ensure that the features are mirrored in the plastic as shown in *Figures 2 and 3*. It is extremely important to ensure proper plastic flow into the features of the Insert as this dictates the torque and pull-out performance. In *Figure 3*, the plastic did not sufficiently flow into the retention features, which will result in low Insert performance.


Though they are both dependent on localized melting of the plastic, heat and ultrasonic installation methods can result in varying performance. Both installation methods have advantages and disadvantages, which should be considered before investing in installation equipment.

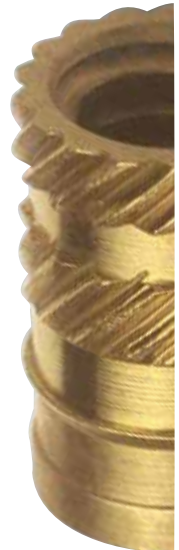

*Figure 1. Undercuts, knurls and/or threads on the outside of the Insert improve performance*

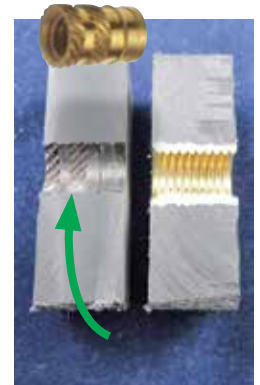

*Figure 2. Proper Plastic Flow*

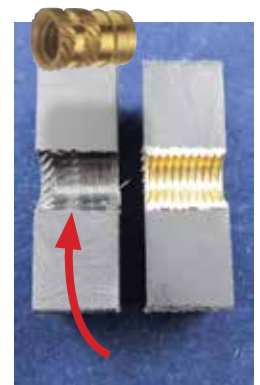

*Figure 3. Improper Plastic Flow*

**TABLE 1. INSTALLATION METHODS FOR THREADED INSERTS**

Installation Method	Thermoplastic	Thermoset
Heat	✓	
Ultrasonic	✓	
Press-In	✓	✓
Self-Tapping	✓	✓
Mold-In	✓	✓

✓ = can be installed in designated plastic type

<sup>1</sup>Creep refers to material deformation or movement when the material is exposed to static mechanical stresses and/or elevated temperatures. (Materials Science and Engineering An Introduction, William D. Callister, 7th Edition).


## General Descriptions

### ULTRASONIC INSTALLATION



An ultrasonic insertion machine converts electrical power into a mechanical vibratory output. The downward force is typically provided by a pneumatic cylinder while ultrasonic horn delivers mechanical energy to the metal-plastic interface. Ultrasonic horns (manufactured from various metals including titanium alloys, stainless steel and aluminum alloys) directly contact the metal Insert. As the horn vibrates, the mechanical energy is transferred to the plastic surrounding the Insert creating heat – and ultimately the melting – necessary for insertion.

### HEAT INSTALLATION

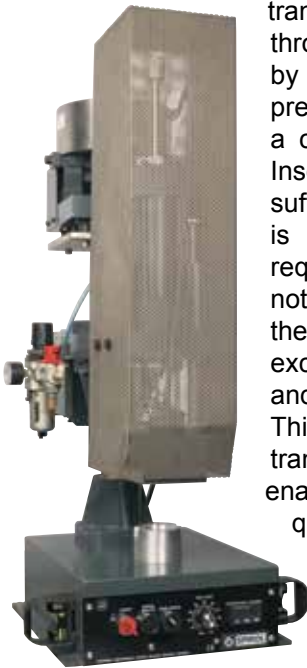

Heat insertion of Inserts is accomplished by transfer of heat from the heated tip through the Insert to the plastic, or by preheating the Inserts and then pressing them in. In both cases, a controlled force is applied to the Insert to ensure that the plastic is sufficiently melted before the Insert is installed. Since heat installation requires heating the entire Insert and not just the metal-plastic interface, the Insert material should have excellent thermal conductivity (brass and aluminum are common choices). This enables the Insert to efficiently transfer heat to the plastic. (It also enables the Insert to cool down quickly after installation). Once the plastic reaches its melting temperature, it begins to fill the retention features of the Insert and then solidifies while inducing minimal stress.

## Primary Features, Benefits, and Limitations of Ultrasonic and Heat Insertion

Due to faster insertion and shorter cooling time, ultrasonic insertion typically has a shorter cycle time than heat insertion when installing a single Insert that has not been preheated. However, heat equipment that preheats the Insert will have comparable installation time as compared to ultrasonic equipment. In addition, when installing multiple Inserts simultaneously, heat insertion will offer faster throughput.

### ADVANTAGES OF ULTRASONIC INSTALLATION

- **Short cycle time for small Inserts.** Ultrasonic installation is generally fast for smaller Inserts (under 1/4" OD), and slows as the Insert size increases.
- **Can be repurposed.** Ultrasonic machines are often re-utilized, or converted from an initial plastic-to-plastic welding process to Insert installation.
- **Interchangeability** – Horn sizes and shapes can be easily changed to accommodate different Insert sizes.

### DISADVANTAGES OF ULTRASONIC INSTALLATION

- **Insufficient melt.**
  - Poor fixturing/clamping of components often times results in cold pressing the Insert. This happens because of damping, which refers to the dissipation of mechanical energy. The damping effect results in poor installation because the mechanical energy is not being localized around the Insert.
  - When Inserts are driven too quickly, the plastic does not have time to fully melt. This is a common problem with ultrasonic insertion that often causes high stress and poor retention within the plastic that can lead to part failure. Failure can happen during installation, but the worst case scenario is when failure happens in the field.
  - The vibratory forces applied via the horn are difficult to control and sometimes parts are forced into the hole before melting has occurred at all. Damage to the Insert or the plastic host can be severe. While sophisticated control systems can help solve this problem, they can nearly double the cost of an already expensive ultrasonic insertion machine.
  - Slight size variations of the Insert and/or hole can be enough to cause insufficient melt – even when the speed of the insertion is slowed down.
- **Metal particulates and flakes.** Metal particulates and flakes may appear when the ultrasonic horn vibrates against the Insert and chips off the Insert material.

- **Excessive noise.** Significant noise problem caused by metal to metal (ultrasonic horn to Insert) contact. The bigger the Insert, the louder the noise will be during installation.
  - **Difficult to install multiple Inserts simultaneously.** It becomes very costly, if not impossible, to install multiple Inserts at the same time.
  - **Insert damage.** Incorrect frequency and/or incorrect down force can cause damage to the Insert. In some cases, the ultrasonic horn can cause damage to the Insert threads, which results in not being able to install the screw or bolt.
  - **Non-headed Inserts.** Extra caution needs to be taken when using non-headed Inserts to ensure proper contact surface is made between the Insert and the horn. Otherwise, damage to the internal threads are likely to occur.
  - **Ultrasonic horns are expensive.** Ultrasonic horns are subject to wear and are very expensive to replace. It is common for them to exceed \$1,000.
- Any Insert can be installed – headed or non-headed.
  - Heat insertion modules can be equipped with vibratory bowl feeders so that the operator does not need to physically touch the Insert during the entire installation process. The Inserts would simply be loaded into a vibratory feeder and advance through the feed tube to a guarded heating chamber. The operator would then load the plastic molded component into the fixture, and activate the machine to install the Insert.
    - o This is extremely important for very small Inserts, which are difficult to singulate and orient.
- **Minimal maintenance.** Heat machines seldom need maintenance (if ever). The maintenance and spare part costs are low – replacement heat tips are approximately \$55.
  - **Higher performance.** Generally, higher performance can be expected from heat installation because of the “through-heating” of the Insert. This enables the melted plastic to fully flow into all retention features. Performance of Inserts that are ultrasonically installed is often times lower because the plastic is not able to fully flow into retention features. This happens because of the minimal heating generated only at the point of interference between the Insert and the host.

### ADVANTAGES OF HEAT INSTALLATION

- **Reliable & consistent.** Lower installation forces enable insertion into thin-walled parts which would be destroyed by ultrasonic equipment. With consistent and adjustable temperature, force and depth settings, an installed Insert with predictable pull-out and torsion failure forces can be designed for the application.
- **Quiet.** Quiet operation eliminates the harsh noise associated with ultrasonic installation.
- **More economical.** Heat installation machines are about 50% less expensive than similar ultrasonic equipment because they are less complex and do not require as many components. Heat installation is comprised of using a heated tip and the insertion force is pneumatically driven under low force; generally under 50 lbs. Ultrasonic installation requires an electronic power supply, cycle controlling timers, an electrical or mechanical energy transducer, and an ultrasonic horn.
- **Easy insertion into deep recesses.** Longer heat tips can be used to enable insertion into deep recesses within a part which would be inaccessible to an ultrasonic horn.
- **Versatile.**
  - The heat installation method is extremely adaptable. Applications that need multiple Inserts on multiple planes can be catered to with platen style heat machines. Prototyping or low volume applications can be catered to with a manual heat machine.
  - Wide range of Insert sizes can be accommodated on the same machine by switching out the interchangeable heat tips.

### POTENTIAL DISADVANTAGES OF HEAT INSTALLATION

- Heat insertion’s slightly longer process time for installation of a single Insert (when the Insert is not preheated) is balanced by its many advantages over ultrasonic installation.

The flexibility, consistency, high performance, and price of heat insertion make it the best choice for installing Inserts into plastic for many applications.

### Conclusion

As much as 75% of the Insert’s performance is a direct result of how well it was installed, therefore all of the factors that impact installation must be carefully controlled in order to maximize performance. With so many different combinations of Insert types, plastic types, and performance requirements, it is recommended that manufacturers partner with industry experts in fastening and assembly of Insert products. Proper choice of the Insert and the installation process can be the difference between part failure in the field and part integrity for the intended life of the assembly.


---

As a manufacturer and designer of both **Insert Installation Equipment** and **Threaded Inserts for Plastics**, **SPIROL** is well equipped to address all of your needs.

# SPIROL®

## TECHNICAL SUPPORT

**SPIROL** has over thirty years experience in the design and installation of Inserts. Our Inserts are designed to maximize and balance tensile (pull-out) and rotational torque performance. Our Application Engineers have the technical know-how and experience to work together with our customers to develop a cost-effective solution to meet the application requirements.

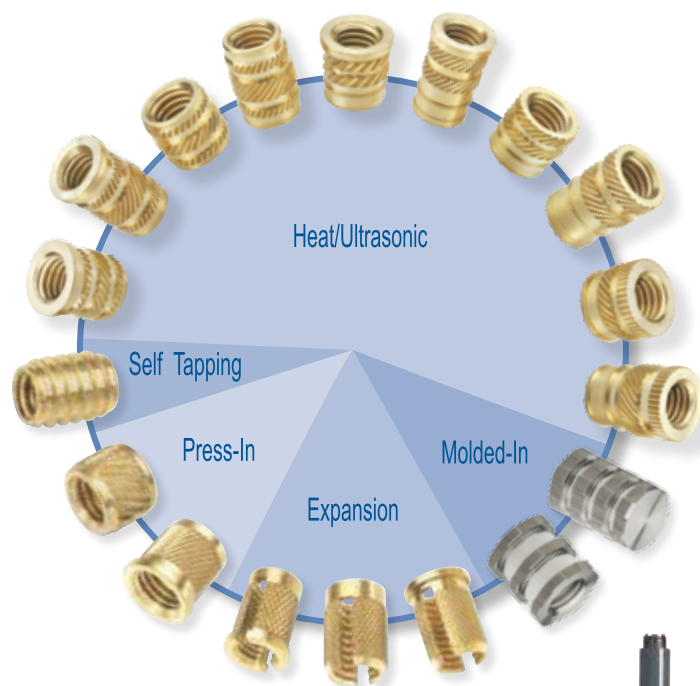

## INSTALLATION SUPPORT

We offer installation technical support and installation equipment. From manual to fully automatic modules, our standardized, time-tested, modular designs are robust, reliable and easily adjustable – allowing simple customization to meet the specific needs of an application.



## **SPIROL offers free Insert samples and Application Engineering support.**

**SPIROL** Application Engineers will review your application needs and work with your design team to recommend the best solution. One way to start the process is to select **Inserts in Plastic** in our **Optimal Application Engineering** portal at [www.SPIROL.com](http://www.SPIROL.com).

ISO/TS 16949 Certified  
ISO 9001 Certified

© 2017 SPIROL International Corporation

No part of this publication may be reproduced or transmitted in any form or by any means, electronically or mechanically, except as permitted by law, without written permission from SPIROL International Corporation.

## Technical Centers

**Americas** **SPIROL International Corporation**  
30 Rock Avenue  
Danielson, Connecticut 06239 U.S.A.  
Tel. +1 860 774 8571  
Fax. +1 860 774 2048

**SPIROL Shim Division**  
321 Remington Road  
Stow, Ohio 44224 U.S.A.  
Tel. +1 330 920 3655  
Fax. +1 330 920 3659

**SPIROL Canada**  
3103 St. Etienne Boulevard  
Windsor, Ontario N8W 5B1 Canada  
Tel. +1 519 974 3334  
Fax. +1 519 974 6550

**SPIROL Mexico**  
Carretera a Laredo KM 16.5 Interior E  
Col. Moisés Saenz  
Apodaca, N.L. 66613 Mexico  
Tel. +52 81 8385 4390  
Fax. +52 81 8385 4391

**SPIROL Brazil**  
Rua Mafalda Barnabé Soliane, 134  
Comercial Vitória Martini, Distrito Industrial  
CEP 13347-610, Indaiatuba, SP, Brazil  
Tel. +55 19 3936 2701  
Fax. +55 19 3936 7121

**Europe** **SPIROL France**  
Cité de l'Automobile ZAC Croix Blandin  
18 Rue Léna Bernstein  
51100 Reims, France  
Tel. +33 3 26 36 31 42  
Fax. +33 3 26 09 19 76

**SPIROL United Kingdom**  
17 Princewood Road  
Corby, Northants  
NN17 4ET United Kingdom  
Tel. +44 1536 444800  
Fax. +44 1536 203415

**SPIROL Germany**  
Ottostr. 4  
80333 Munich, Germany  
Tel. +49 89 4 111 905 71  
Fax. +49 89 4 111 905 72

**SPIROL Spain**  
08940 Cornellà de Llobregat  
Barcelona, Spain  
Tel. +34 93 193 05 32  
Fax. +34 93 193 25 43

**SPIROL Czech Republic**  
Sokola Tümy 743/16  
Ostrava-Mariánské Hory 70900  
Czech Republic  
Tel/Fax. +420 417 537 979

**SPIROL Poland**  
ul. M. Skłodowskiej-Curie 7E / 2  
56-400, Oleśnica, Poland  
Tel. +48 71 399 44 55

**Asia Pacific** **SPIROL Asia Headquarters**  
1st Floor, Building 22, Plot D9, District D  
No. 122 HeDan Road  
Wai Gao Qiao Free Trade Zone  
Shanghai, China 200131  
Tel. +86 21 5046 1451  
Fax. +86 21 5046 1540

**SPIROL Korea**  
160-5 Seokchon-Dong  
Songpa-gu, Seoul, 138-844, Korea  
Tel. +86 (0) 21 5046-1451  
Fax. +86 (0) 21 5046-1540

e-mail: [info@spirol.com](mailto:info@spirol.com)

**SPIROL.com**