

Fastening Techniques for Plastic Housings

by Jeff Greenwood, Product Sales Engineer - Pins
SPIROL International Corporation, Danielson, CT, U.S.A.

Plastics have become more and more common in manufacturing, and there is still plenty of room for growth. As such, Engineers must ensure that new plastic products meet performance requirements while considering component costs and assembly cycle time. While plastic materials provide many advantages, they can introduce manufacturing challenges during the assembly process that lead to inefficiencies, scrapped parts, and added costs. This article addresses the advantages and disadvantages of the following fastening methods used to assemble plastic components: solid pins, adhesives, screws, bolts, and snap-fit joints.

Serviceable vs Permanent

Before selecting the fastening method, designers must decide if their product needs to be serviceable. For example, products like fire detectors, television remotes, and key fobs must be designed so that consumers can disassemble the product to replace batteries. Conversely, products like hair dryers and single-use medical devices are typically not designed to be disassembled or serviced. Furthermore, some designers will specifically design components to be tamper resistant so that consumers cannot easily disassemble the product (i.e. electronics).

Serviceable

Screws, bolts, and snap-fit joints (i.e. plastic buckles) are the most common fastening methods used in serviceable products. Bolts and screws provide a clamp load that compresses the components within an assembly. This is accomplished when the bolt/screw is torqued beyond the point at which the head makes contact with the mating component. Bolts and screws provide superior retention compared to snap-fit joints, which rely on the strength of the plastic component itself.

Snap-fit joints provide retention by interlocking multiple components together. Snap-fit joints can be assembled quickly and they simplify the overall assembly process because there are fewer parts on the bill of materials. Snap-fit joints are often preferred when minimal retention is needed in a plastic product. For example shown in *Figure 1*, most pocket calculators use snap-fit joints for the battery cover so that consumers can easily change the batteries.

Permanent

Solid pins, adhesives, screws, bolts, and snap-fit joints are all commonly used to fasten permanent assemblies. While designers may not specifically require a new product design to be serviceable, many products still use serviceable fasteners like screws for convenience and operator familiarity. For example shown in *Figure 1*, most pocket calculators use screws to connect the plastic housing together even though consumers do not need to pull the assembly apart during the useful life of the product.

Solid pins and adhesives are preferred for permanent assemblies that are meant to be tamper resistant because they provide excellent retention in plastics. Adhesives provide retention by binding multiple components together. Meanwhile, solid pins provide retention by deforming the host material, creating interference. Note that solid pins with retention features (i.e. knurls, barbs) are preferred over plain dowels because they allow for wider hole tolerances and reduce stresses on the plastic components.

Tamper resistance helps mitigate the risk of warranties, product damage, or environmental exposure (i.e. moisture, particles). Additionally, serviceable fasteners like screws create a significant safety hazard in products like children's toys (choking hazard). For these reasons, solid pins and adhesives are typically the preferred fastening options for items that do not require servicing.

Assembly Process & Maintenance

Solid Pins

Solid pins are easily installed with presses, ranging from manual to fully automatic. During the installation process, the press provides a linear force to advance the pin until it reaches a predefined stop distance. Assemblies with multiple

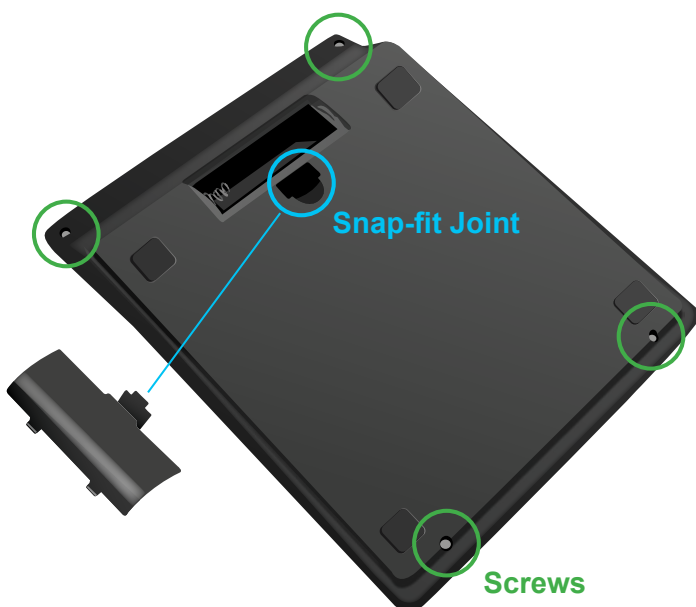


Figure 1
Back of a pocket calculator

pins can use platen-style presses to install multiple solid pins simultaneously. For these reasons, the assembly cycle time for solid pins is quicker than using screws or bolts. When the components are fixtured and oriented correctly, solid pins also provide the lowest failure rate compared to other fastening methods. The installation equipment used to install solid pins has minimal maintenance requirements.

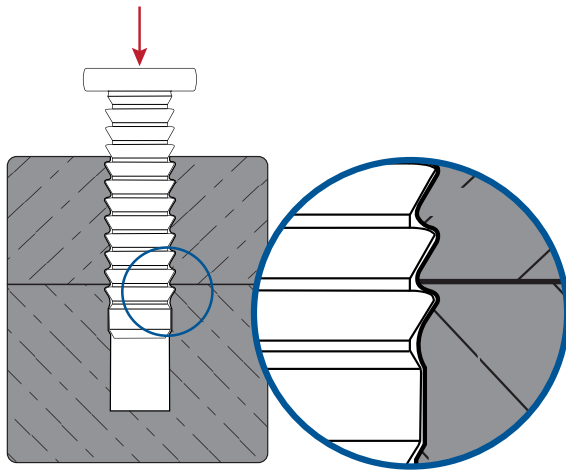


Figure 2
Plastic backfill after installation of barbed Solid Pin

Note that some Solid Pins, like **SPIROL's Press-N-Lok™ Pin** in *Figure 3*, are designed to be hidden in the final assembly for aesthetics. This allows for the use of blind holes.

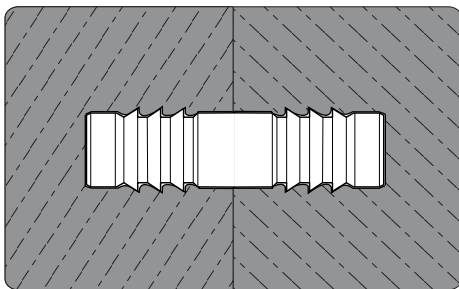


Figure 3
Press-N-Lok™ Pin cross section

Adhesives

Adhesives can be applied with manual handguns or automated dispensing equipment. Oftentimes, surface preparation is required for the host components. The process of applying the adhesive during assembly is quite complicated and requires skilled operators. If too little or too much adhesive is applied to a single assembly, it can lead to field failures. Furthermore, many adhesives require temperature control, pressure control, and/or the controlled mixing of different fluids prior to contact with the host components. After the adhesive is applied, there is a curing process that in some cases can extend beyond 24 hours!

The installation equipment for adhesives requires extensive maintenance and monitoring, as adhesives are messy and the equipment can clog if contaminants are introduced. In addition, many adhesives have a limited shelf life. All of this adds costs and complexity to the assembly process and also reduces machine availability. With so many variables involved, repeatability and control can be challenging.

Screws

Screws tap into the host component and can be installed with handheld torque screwdrivers or fixtured automatic screwdrivers. Both types of screwdrivers rotate the screw to a specified torque value. It's important to recognize that this is considerably more complicated than the installation process for solid pins. Manufacturers can experience issues orienting the screws to the driver bit and holding the screws in place. If the screws are not perfectly aligned, they can strip the host plastic and cause scrapped assemblies. Another common issue when installing screws directly into plastic is that they can become loose over time due to plastic creep or stress relaxation. While screws are inexpensive, readily available, and familiar for operators, they present manufacturing challenges during assembly.



Figure 4
Misaligned Screw

Bolts

Bolts function similarly to screws, only they thread into a nut or metal threaded insert instead of the plastic host. Bolts provide the greatest retention among the options in this article and allow for unlimited assembly and disassembly (without damaging the plastic) when used in conjunction with a nut or threaded insert. A properly bolted joint in a plastic component will use three separate components: the bolt, a compression limiter, and a nut or threaded insert. This adds complexity and cost to the bill of materials as well as the assembly process. Bolts should be avoided unless the desired clamp load cannot be achieved with alternate fastening methods.




Figure 5
Ideal Bolted Joint

Snap-fit Joints

Snap-fit joints are typically assembled manually by pressing components together. The assembly process for snap-fit joints can vary significantly depending on the design of the interlocking components. Some snap-fit joints are designed to be serviceable while others are designed to be permanent. By using snap-fit joints, manufacturers are minimizing the total number of parts used per assembly. Ultimately, this reduces costs, inventory, and handling. However, snap-fit joints provide lower retention than other fastening methods, as snap-fit joints

rely on the strength of the plastic components themselves. Snap-fit joints are preferred for assemblies that are exposed to minimal loads. However, snap-fit joints are prone to failure and can create environmental hazards like choking hazards.

Features, Advantages, Benefits

	Solid Pins	Adhesives	Screws/ Bolts	Snap-fit Joints
Permanent / tamper resistant	X	X		X
Serviceable			X	X
Can be hidden in final assembly	X	X		X
Simple installation process	X			X
Low maintenance assembly equipment	X		X	X
Quickest assembly cycle time				X
Lowest failure rate during assembly	X			
Effective for joining plastic components	X	X	X	
Effective for joining plastics to dissimilar materials	X	X	X	X
No secondary curing process required	X		X	X
Effective for joining thin or tiny components		X		
Minimal risk of choking hazard	X	X		

Conclusion

Designers must consider performance, simplicity, fastener costs, and the cost of assembly when designing plastic housings. It is recommended that the design engineers work with the manufacturing engineers early in the design stage so that the total assembly process is considered. Far too often, new product designs are finalized without considering assembly cycle time, scrap rate, maintenance costs, and consumer behavior throughout the product's useful lifetime.

SPIROL offers Application Engineering support!

SPIROL Application Engineers will review your application needs and work with your design team to recommend the best solution. For technical support, feel free to contact **SPIROL** directly or start the process by selecting **Pinning Applications** in our **Optimal Application Engineering** portal at www.SPIROL.com



Technical Centers

Americas

SPIROL International Corporation
30 Rock Avenue
Danielson, Connecticut 06239 U.S.A.
Tel. +1 860 774 8571
Fax. +1 860 774 2048

SPIROL Shim Division
321 Remington Road
Stow, Ohio 44224 U.S.A.
Tel. +1 330 920 3655
Fax. +1 330 920 3659

SPIROL Canada
3103 St. Etienne Boulevard
Windsor, Ontario N8W 5B1 Canada
Tel. +1 519 974 3334
Fax. +1 519 974 6550

SPIROL Mexico
Avenida Avante #250
Parque Industrial Avante Apodaca
Apodaca, N.L. 66607 Mexico
Tel. +52 81 8385 4390
Fax. +52 81 8385 4391

SPIROL Brazil
Rua Mafalda Barnabé Soliane, 134
Comercial Vitória Martini, Distrito Industrial
CEP 13347-610, Indaiatuba, SP, Brazil
Tel. +55 19 3936 2701
Fax. +55 19 3936 7121

Europe

SPIROL France
Cit  de l'Automobile ZAC Croix Blandin
18 Rue L na Bernstein
51100 Reims, France
Tel. +33 3 26 36 31 42
Fax. +33 3 26 09 19 76

SPIROL United Kingdom
17 Princewood Road
Corby, Northants
NN17 4ET United Kingdom
Tel. +44 1536 444800
Fax. +44 1536 203415

SPIROL Germany
Ottostr. 4
80333 Munich, Germany
Tel. +49 89 4 111 905 71
Fax. +49 89 4 111 905 72

SPIROL Spain
08940 Cornell  de Llobregat
Barcelona, Spain
Tel. +34 93 669 31 78
Fax. +34 93 193 25 43

SPIROL Czech Republic
Sokola T my 743/16
Ostrava-Mari nsk  Hory 70900
Czech Republic
Tel/Fax. +420 417 537 979

SPIROL Poland
ul. Solec 38 lok. 10
00-394, Warszawa, Poland
Tel. +48 510 039 345

Asia Pacific

SPIROL Asia Headquarters
1st Floor, Building 22, Plot D9, District D
No. 122 HeDan Road
Wai Gao Qiao Free Trade Zone
Shanghai, China 200131
Tel. +86 21 5046 1451
Fax. +86 21 5046 1540

SPIROL Korea
160-5 Seokchon-Dong
Songpa-gu, Seoul, 138-844, Korea
Tel. +86 (0) 21 5046-1451
Fax. +86 (0) 21 5046-1540

e-mail: info@spirol.com

SPIROL.com